



EU-TYPE EXAMINATION CERTIFICATE



The following model of Personal Protective Equipment has been subjected to an EU-type examination in accordance with the module B of the PPE regulation (2016/425) and in accordance with the current certification process. It has been shown to satisfy to essential health and safety requirements.

Certificate N° 0075/2925/162/05/26/1075

Issued by CTC, Notified Body N°0075, to the following model of personal protective equipment :

Manufacturer: Bisicur Srl

Trav. Via Martiri della Liberta' 13 25030 Roncadelle (BS)

Italy

Description


PPE Type: protective glove against mechanical risks

Product reference: E80.06

Glove description: 18G HPPE(high performance polyethylene) + STEEL WIRE LINER, BLACK PALM EMBOSSED NITRILE GLOVE, TOUCH SCREEN, REINFORCEMENT BETWEEN THUMB AND INDEX FINGER

Available sizes: 6 - 11

Pictures:

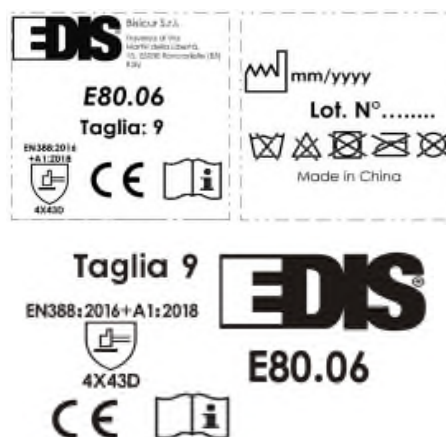

Reference standard:

Levels of performance / class of protection

« X » indicates that the glove has not been submitted to the test or the test method appears not to be suitable for the glove design or material.
« 0 » indicates that the glove falls below the minimum performance level for the individual hazard.

EN ISO 21420:2020 + A1:2024

compliant

EN 388:2016 + A1:2018

4 X 4 3 D

At the date of the certificate, the product is in compliance with Annex XVII of REACH regulation (n° 1907/2006 and revisions)

Full description of the PPE, reference rules verified in the context of the EU-type examination and information given on the product are detailed in the manufacturer's technical file and the user instructions index 01 dated from May 2026.

NOTA : Any modification to new items of the personal protective equipment object of this EU type approval certificate or any modification of the information contained in the manufacturer technical file which served for the deliverance of the EU type approval certificate (change of address, change of company status) should be brought to the attention of the notified body in accordance with Annex V §7.2 of Regulation 2016/425. Any marking on the PPE which is not concerned by the Regulation (UE) 2016/425, is not covered by this certificate.

Issued in Lyon by
Séverine AUBERT
Certification team Leader



Date of first issue: 26 May 2026
Date of end of validity: 25 May 2031



Accreditation n° 5-0594
Scope available on:
www.cofrac.fr

In application of the Regulation 2016/425 of the European parliament and the Council of 9th March 2016 related to Personal Protective Equipment and repealing the Directive 89/686/EEC.

www.ctcgroupe.com

cemarking@ctcgroupe.com

CTC - 4, rue Hermann Frenkel - 69367 Lyon cedex 07 - France
Tél. : +33 (0)4 72 76 10 10 - Fax : +33 (0)4 72 76 10 00 - ctclyon@ctcgroupe.com

Comité Professionnel de Développement Économique (CPDE) Cuir Chaussure Maroquinerie Ganterie
Loi 78-654 du 22.06.1978 - Siret 77564972600160 - Code NAF 9412Z - TVA FR 88775649726

Bisicur Srl

MANUFACTURER'S TECHNICAL FILE TO THE PPE REGULATION 2016/425

Reference of the product	:	E80.06
Article code	:	/
Technical file index	:	01
Last update	:	May 2026

IDENTIFICATION

Reference of the product :	:	E80.06
Article code :	:	/
Basic Model		
Technical file index :	:	01
Last update :	:	May 2026

Manufacturer :

Bisicur Srl

Trav. Via Martiri della Liberta' 13 25030 Roncadelle (BS)

Italy

tel : 030/2583661
fax : 030/2583626

Factory :

HONEST SAFETY PRODUCTS CO., LTD.

ROOM 2801C, BAOAN TOWER, NO. 800 DONGFANG RD., PUDONG, SHANGHAI
200122

CHINA

tel: 021-50585599
fax: 021-50585577

GLOVE DESCRIPTION

General glove description and intended use:

18G HPPE(high performance polyethylene) + STEEL WIRE LINER, BLACK PALM EMBOSSED NITRILE GLOVE, TOUCH SCREEN, REINFORCEMENT BETWEEN THUMB AND INDEX FINGER

This glove is designed against mechanical risks.

Type of coating finish : foam

Visual description (picture back and palm sides) :



Risk assessment (Essential Health and Safety Requirement. Annex II - PPE Regulation)

		Applicable
§1	Requirements defined in the Annex II §1 are applicable to all PPE	☒
§1.4	Manufacturer's instructions and information is available	☒
§2.5	PPE which may be caught up during use	☒
§2.12	PPE bearing one or more identification markings or indicators directly or indirectly relating to health and safety	☒
§3.3	The PPE is intended to protect against mechanical injuries	☒

Glove constitution :

	Reference	Color	Material	Surfacic mass (g/m ²)	Gauges	Thickness
Palm		Black	Nitrile			0.8mm
		grey	HPPE (high performance polyethylene)/ steel wire	240g/m ²	18 Gauges	
	thumb crotch	Black	Nitrile			1mm
Back		grey	HPPE (high performance polyethylene)/ steel wire	240g/m ²	18 Gauges	
Cuff		grey/ white	HPPE (high performance polyethylene)/ steel wire/ elastic	400g/m ²	18 Gauges	
Binding		yellow	polyester			

PROTECTION SCOPE

This product meets the essential requirements of the Personal Protective Equipment Regulation (EU) 2016/425.

This glove is designed against mechanical risks.

It is a category II product.

GENERAL REQUIREMENTS

Standard EN ISO 21420:2020 + A1:2024

Dexterity : 5

Available size range: 6 - 11

The hand sizing system is based on hand circumference and hand length as defined in EN ISO 21420 + A1 Annex B table B.1

SPECIFIC REQUIREMENTS AND PERFORMANCE LEVELS

« X » indicates that the glove has not been submitted to the test or the test method appears not to be suitable for the glove design or material.

« 0 » indicates that the glove falls below the minimum performance level for the individual hazard.

Mechanical hazard EN 388:2016 + A1:2018

Protection offered	Performance levels
Abrasion resistance	4
Blade cut resistance	X
Tear strength resistance	4
Puncture resistance	3
Cut Resistance method (EN ISO 13997)	D
Impact Protection	N/A

The levels of performance have been measured on the palm.

TEST REPORTS

EN ISO 21420+A1 + innocuousness	S260302641_2 S230504161_2 S260302516_2 (thumb crotch)
EN 388	S260302641_2 S260403189_1

MARKING - PACKAGING

Information printed on the glove :

Logo of Manufacturer :

Logo 

Glove's reference : E80.06

Article Code : /

Size indicator

Pictograms related to risks against which protection is offered with performance levels


Information pictogram

Address of Manufacturer :


Date of Manufacture (month/year) and/or serial/batch number :

Date of obsolescence (month/year) if applicable:

Marking example :

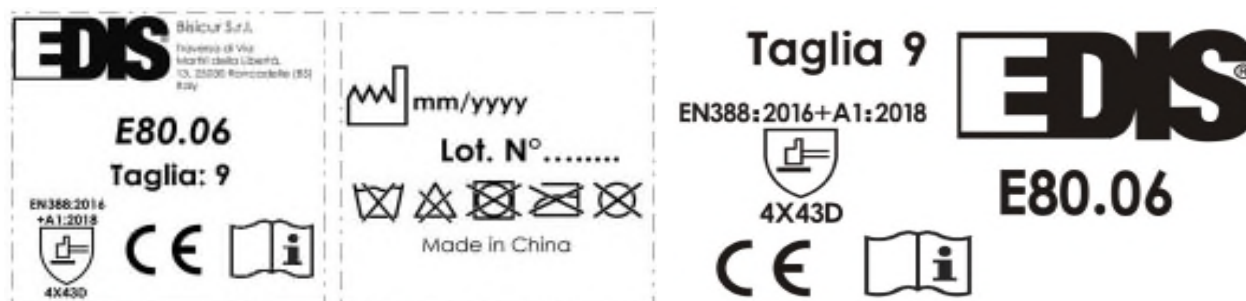

Marking of packaging example :

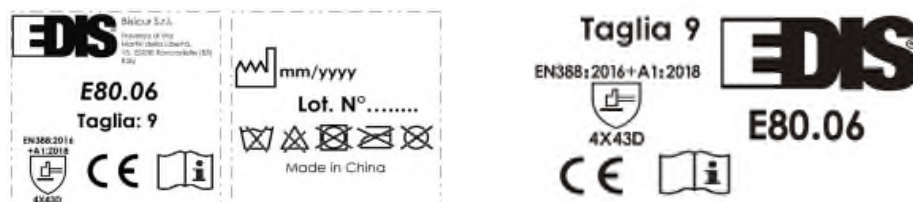

Method of marking on the glove :

each glove with printing on hand back and sewn label on cuff

Packaging suitable for transport:

12 pairs in a bundle, 120 pairs in a carton

PPE subject to ageing :

The design performance can not be significantly affect by ageing when stored in appropriate conditions (humidity, temperature, clean , ventilated, light).

Cleaning instructions:

This glove is not washable.

MEANS OF CONTROL

Products inspection standard

1. Inspection content.

- 1). The appearance of gloves must be smoothly, no air bubble, Impurity, crack, dirt, passes of rubber.
- 2). The position of the rubber must be right, neat, and the figure of wrinkle must be even.
- 3). Rubber must be felted securely.
- 4). Logo printed must be sharp and the position must be correct.
- 5). The weight and the length of the gloves must conform to the standard and request mentioned in the contract.

2. Inspection procedure

- 1) Before the products finished, quality inspectors went to the packing room, and check all of the products, then take the quality goods to the qualified area, left-over be handled as inferior goods. all of them are marked obviously.
- 2) For the goods in the qualified area, inspectors must check them no less than 10% before leave factory. The rate of quantity products must be more than 98%, otherwise, the rate of extraction is extend to 30%. Products won't leave factory until quality products rate achieves 98%.
- 3). The defective goods are handled in another way according to the regulation about inferior products
- 4). The gloves are done EN388 (abrasion, cut, puncture, tear) + EN ISO 21420 test for each 5 years.

INSTRUCTIONS FOR USE

Bisicur Srl

Trav. Via Martiri della Liberta' 13 25030 Roncadelle (BS)

Italy

Glove reference : E80.06

User notice index : 01

Last update : May 2026

Glove description :


18G HPPE(high performance polyethylene) + STEEL WIRE LINER, BLACK PALM EMBOSSED NITRILE GLOVE, TOUCH SCREEN, REINFORCEMENT BETWEEN THUMB AND INDEX FINGER

This glove is a personal protective equipment belonging to the category II.

It meets the requirements of the PPE Regulation 2016/425 : innocuousness, comfort, solidity.

It has been subject to a UE-type Examination performed by :

C.T.C. (0075)
4, rue Hermann Frenkel
69367 LYON Cedex 07
FRANCE

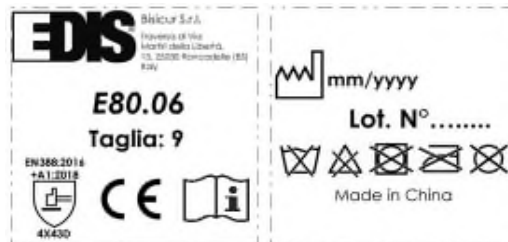

The glove meets the requirements of the standard EN ISO 21420:2020 + A1:2024 « Protective Gloves - General requirements and test methods ».

Dexterity: 5

Available size range: 6 - 11

The hand sizing system is based on hand circumference and hand length as defined in EN ISO 21420+A1 Annex B.

Information about marking

« X » indicates that the glove has not been submitted to the test or the test method appears not to be suitable for the glove design or material.

« 0 » indicates that the glove falls below the minimum performance level for the individual hazard.



The CE marking means that this product meets the requirements of the regulation 2016/425

Mechanical hazard - EN 388:2016 + A1:2018



4 X 4 3 D

Levels of performance



Abrasion resistance	4	(on 4 maxi)
Blade cut resistance	X	(on 5 maxi)
Tear resistance	4	(on 4 maxi)
Puncture resistance	3	(on 4 maxi)
Cut Resistance method (EN ISO 13997)	D	(A to F)
Impact Protection		

Read carefully the instructions for use provided with the product

Protection limit:

Users should be warned that gloves should not be worn when there is a risk of entanglement by moving parts of machines.

This model does not contain any substances at levels that are known to, or suspected to, adversely affect user hygiene or health.

The protection against risks or hazards which are not mentioned in this document is not warranted.

These levels of performance are obtained from the tests done according to conditions defined by the applicable standards.

The levels of performance mentioned are only valid for new gloves, not washed, nor regenerated.

Before use, the glove shall be visually inspected for any defect or imperfections. In case of deterioration, the gloves must be scrapped (abrasion, cut, tear...).

Mechanical protection:

For gloves with two or more layers the overall classification does not necessarily reflect the performance of the outermost layer.

The levels of performance against mechanical risks are only valid for the palm of the glove.

Storage and cleaning notice

Keep in its original packaging, under ordinary temperature and humidity conditions and in clean, covered and ventilated premises.

This glove is not washable.

PPE subject to ageing :

The design performance can not be significantly affect by ageing when stored in appropriate conditions (humidity, temperature, clean , ventilated, light).

Declaration of conformity :

Available with product.

Available on : <https://info.arrowweld.it/bisicur/>