# EU-TYPE EXAMINATION CERTIFICATE



The following model of Personal Protective Equipment has been subjected to an EU-type examination in accordance with the module B of the PPE regulation (2016/425) and has been shown to satisfy to essential health and safety requirements.

# Certificate N° 0075/1491/162/08/21/1439

Issued by CTC, Notified Body N°0075, to the following model of personal protective equipment :

### Manufacturer : CENIGOMMA SRL STRADA DELL ALPO 26,37136 VERONA ITALY

Description PPE Type : Product reference : Article code : Glove description :

### protective glove against mechanical risks, cold risks E11.06WN

5 fingers white(natural) pig grain leather on palm and part of the back,black elastic fabric on part of the back,terry fleeced lining inside,elastic on wrist

Available sizes : Pictures :

### XS/6-3XL/12



**Reference standard :** 





#### Levels of performance / class of protection

« X » indicates that the glove has not been submitted to the test or the test method appears not to be suitable for the glove design or material. « 0 » indicates that the glove falls below the minimum performance level for the individual hazard.

EN ISO 21420:2020	-
EN 388:2016 + A1:2018	3112X
EN 511:2006	1 1 X

At the date of the certificate, the product is in compliance with Annex XVII of REACh regulation (n° 1907/2006 and revisions)

Full description of the PPE, reference rules verified in the context of the EU-type examination and information given on the product are detailed in the manufacturer's technical file and the Instruction for Use index 01 dated from AUGUST 2021

NOTA : Any modification to new items of the personal protective equipment object of this EU type approval certificate or any modification of the information contained in the manufacturer technical file which served for the deliverance of the EU type approval certificate (change of address, change of company status) should be brought to the attention of the notified body in accordance with Annex V §7.2 of Regulation 2016/425. Any marking on the PPE which is not concerned by the Regulation (UE) 2016/425, is not covered by this certificate.

Issued in Lyon by Didier GUISADO Certification and Quality Manager

USTA



#### Date of first issue : 27 August 2021 End of validity date : 27 August 2026



# cofrac

Accreditation n# 5-0594 Scope available on:

In application of the Regulation 2016/425 of the European parliament \_\_\_\_\_\_ and the Council of 9th March 2016 related to Personal Protective Equipment and repealing the Directive 89/686/EEC. www.ctcgroupe.com

cemarking@ctcgroupe.com

CTC - 4, rue Hermann Frenkel - 69367 Lyon cedex 07 - France Tél. : +33 (0)4 72 76 10 10 - Fax : +33 (0)4 72 76 10 00 - ctclyon@ctcgroupe.com

Comité Professionnel de Développement Économique (CPDE) Cuir Chaussure Maroquinerie Ganterie Loi 78-654 du 22.06.1978 - Siret 77564972600160 - Code NAF 9412Z - TVA FR 88775649726

## **CENIGOMMA SRL**

# MANUFACTURER'S TECHNICAL FILE TO THE PPE REGULATION 2016/425

Reference of the product	:	E11.06WN
Article code	:	1
Technical file index	:	01
Last update	:	AUGUST 2021

# **IDENTIFICATION**

Reference of the product : Article code :	:	E11.06WN /
Basic Model		
Technical file index :	:	01
Last update :	:	AUGUST 2021

### Manufacturer :

CENIGOMMA SRL STRADA DELL ALPO 26,37136 VERONA ITALY tel : 045-8283794 fax : 045-8283794

#### **Factory**:

CENIGOMMA SRL STRADA DELL ALPO 26,37136 VERONA ITALY tel: 045-8283794 fax: 045-8283794

# **GLOVE DESCRIPTION**

### General glove description and intended use:

5 fingers white(natural) pig grain leather on palm and part of the back,black elastic fabric on part of the back,terry fleeced lining inside,elastic on wrist

This glove is designed against mechanical risks, cold risks. Type of coating finish : no coating

### Visual description (picture back and palm sides) :



Risk assessment (Essential Health and Safety Requirement. Annex II - PPE Regulation)				
	Applicable			
			✓ Standard	
§1	§1 Requirements defined in the Annex II §1 are applicable to all PPE	$\checkmark$	✓ Instruction for use	
			✓ Marking	
			Standard	
§1.4	Manufacturer's instructions and information is available	1	✓ Instruction for use	
			Marking	
			Standard	
§2.5	PPE which may be caught up during use	$\checkmark$	✓ Instruction for use	
			Marking	
§2.12	PPE bearing one or more identification markings or indicators directly or indirectly	~	<ul> <li>✓ Standard</li> <li>✓ Instruction for use</li> </ul>	
32.12	relating to health and safety		Marking	
			✓ Standard	
§2.14	Multi-risk PPE	~	✓ Instruction for use	
			✓ Marking	
		$\leq$	✓ Standard	
§3.3	The PPE is intended to protect against mechanical injuries		✓ Instruction for use	
			✓ Marking	
	Protection against cold	1	✓ Standard	
§3.7			✓ Instruction for use	
			✓ Marking	

### **Glove constitution :**

	Reference	Color	Material	Surfacic mass (g/m <sup>2</sup> )	Gauges	Thickness
Palm		white (natural)	pig grain leather			0.9-1.0mm
	finger	white (natural)	pig grain leather			0.9-1.0mm
Back		black	polyerster/spandex	270g/m²	10gauge	
Dack			natural			
	knuckles	white (natural)	pig grain leather			
	full lining	black	polyester	230g/m2	7gauge	
Lining	fourchette lining	white	thinsulate	170g/m2	24gauge	
		white (natural)	pig grain leather			0.9-1.0mm
Cuff		black	polyerster/spandex	270g/m <sup>2</sup>	10gauge	
	Internal	natural	elastic			
Binding		black	PU/polyester			

### **PROTECTION SCOPE**

This glove meets the essential requirements of the Personal Protective Equipment Regulation 2016/425. This glove is designed against mechanical risks, cold risks. It is a category II product.

### **GENERAL REQUIREMENTS**

### Standard EN ISO 21420 : 2020

Dexterity : 2 Available size range: XS/6-3XL/12

The hand sizing system is based on hand circumference and hand length as defined in EN ISO 21420 Annex B table B.1

### SPECIFIC REQUIREMENTS AND PERFORMANCE LEVELS

« X » indicates that the glove has not been submitted to the test or the test method appears not to be suitable for the glove design or material.

« 0 » indicates that the glove falls below the minimum performance level for the individual hazard.

# Mechanical hazard EN 388 : 2016 + A1 : 2018

Protection offered	Performance levels
Abrasion resistance	3
Blade cut resistance	1
Tear strength resistance	1
Puncture resistance	2
Cut Resistance method (EN ISO 13997)	Х
Impact Protection	-

The levels of performance have been measured on the palm.

### Cold hazard EN 511 : 2006

	Minimum performance level require	Performance obtained
Abrasion resistance	≥ 1	3
Tear strength	≥ 1	1
Flexibility behaviour for coated materials	no crack	Х
Extreme cold flexibility for glove resistant to -30°C	no crack	Х
Convective cold	_	1
Contact cold	_	1
Water penetration	0 or 1	Х

# **TEST REPORTS**

Laboratory	CTC	Other
	S201213064_1 S201212703_1 S200504357_3 S201212701_1	
EN 388	S200504357_3	
EN 511	S200908854_1	

# MARKING - PACKAGING


### Information printed on the glove :

Logo of Manufacturer : Logo (C Glove's reference : E11.06WN Article Code : / Size indicator Pictograms related to risks against which protection is offered with performance levels Information pictogram Address of Manufacturer : Date of Manufacture (month/year) and/or serial/batch number : Date of obsolescence (month/year) if applicable:

### Marking example :



### Marking of packaging example :

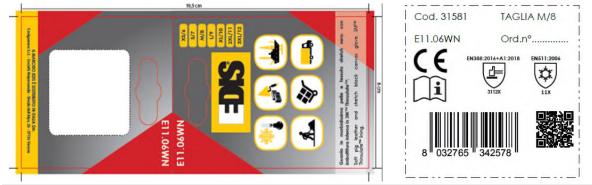

### Method of marking on the glove :

sewing label on the glove + marked on the headcard

### Packaging suitable for transport:

12 PAIRS IN ONE POLYBAG, 5 POLYBAG IN ONE CARTON **PPE subject to ageing** :

The design performance can not be significantly affect by ageing when stored in appropriate conditions (humidity, temperature, clean, ventilated, light).

### Cleaning instructions:

The gloves are not washable.

### **MEANS OF CONTROL**

Factory use Sampling Plan AQL 2.5 to do goods inspection; glove should meet EN ISO 21420 and EN388 test result; Glove should not be broken, thread should not be out. no hole, no mold, no scratch,Nitrile coat should even, no bubble; Goods will follow sampling plan AQL 2.5 to do lab tests, to ensure glove reach EN388 standard; each batch test need attach the testing report marked date; all results need filed in system for easy checking; Inspection staff need do double inspection work to ensure every step's records inlcuding package which meet the insturction required; Glove inspection work on EN ISO 21420 and EN388,EN511 must be tested once every year

#### **INSTRUCTION FOR USE**

#### **CENIGOMMA SRL**

STRADA DELL ALPO 26,37136 VERONA ITALY Glove reference : E11.06WN Article code: / User notice index : 01 AUGUST 2021 Last update :



#### Glove description :

5 fingers white(natural) pig grain leather on palm and part of the back,black elastic fabric on part of the back,terry fleeced lining inside,elastic on wrist

This glove is a personal protective equipment belonging to the category II.

It meets the requirements of the PPE Regulation 2016/425 : innocuousness, comfort, solidity.

It has been subject to a UE-type Examination performed by :

C.T.C. (0075) 4, rue Hermann Frenkel 69367 LYON Cedex 07 FRANCE

#### Applicable standards :

The glove meets the requirements of the standard EN ISO 21420:2020 « Protective Gloves - General requirements and test methods ».

Dexterity:

2 Available size range: XS/6-3XL/12

The hand sizing system is based on hand circumference and hand length as defined in EN ISO 21420 Annex B.

Moreover, this glove has been designed for the following applications :

« X »indicates that the glove has not been submitted to the test or the test method appears not to be suitable for the glove design or material. « 0 » indicates that the glove falls below the minimum performance level for the individual hazard.

Application : Mechanical hazard - EN 388:2016 +

A1:2018



3112X Levels of performance

Application : Cold risk - EN 511:2006



11X Levels of performance

		-
Abrasion resistance	3	(on 4 maxi)
Blade cut resistance	1	(on 5 maxi)
Tear resistance	1	(on 4 maxi)
Puncture resistance	2	(on 4 maxi)
Cut Resistance method (EN ISO 13997)	Х	(A to F)
Impact Protection		

Convective cold	1	(on 4 maxi)
Contact cold	1	(on 4 maxi)
Water penetration	Х	



Read carefully the instructions for use provided with the product

#### Protection limit :

This glove doesn't give a protection for a temperature under -50°C.

This glove must be used for an intense activity until -13°C.

This glove provides a protection for a limited contact time with cold products.

The performance levels can be reduced due to a level X of water penetration.

Users should be warned that gloves should not be worn when there is a risk of entanglement by moving parts of machines.

This model does not contain any substances at levels that are known to, or suspected to, adversely affect user hygiene or health.

The protection against risks or hazards which are not mentioned in this document is not warranted.

These levels of performance are obtained from the tests done according to conditions defined by the applicable standards.

The levels of performance mentioned are only valid for new gloves, not washed, nor regenerated.

Before use, the glove shall be visually inspected for any defect or imperfections. In case of deterioration, the gloves must be scrapped (abrasion, cut, tear, ...).

No flame protection is claimed. This glove shall not be in contact with naked flame.

For multilayer gloves or multilayer hands protective equipment for thermal domestic risks with different layers of material, the performance levels are warranted only for the whole product.

For gloves with two or more layers the overall classification does not necessarily reflect the performance of the outermost layer.

The levels of performance against mechanical risks are only valid for the palm of the glove .

#### Storage and cleaning notice

Keep in its original packaging, under ordinary temperature and humidity conditions and in clean, covered and ventilated premises.

The gloves are not washable.

#### PPE subject to ageing :

The design performance can not be significantly affect by ageing when stored in appropriate conditions (humidity, temperature, clean, ventilated, light).

#### Declaration of conformity :

Available with product.